

348

μmol/s
PPF OUTPUT

2.9

μmol/J
PHOTON EFFICACY

120

W
RATED POWER

600

LED DIODES

OVERVIEW



The Lucius Under Canopy 120W is a linear fixture designed to light the lower canopy where the top light no longer reaches with useful intensity. A 255° emission angle illuminates the plant from below and from the sides, improving photosynthesis and bud development in the lower third of the plant. Up to six units can be daisy-chained from a single outlet.

- 255° three-sided emission
- Daisy-chain up to 6 units
- 2 adjustable standing kits (12 – 22 cm)
- EU plug, 1.8 m lead included
- L90 rated life > 50,000 h
- 3-year warranty

OPTICAL

Photosynthetic photon flux (PPF)	348 μmol/s
Photon efficacy	2.9 μmol/J
Spectrum	Full spectrum
Diodes	600 · Samsung LM281B + OSRAM SSL 80 (660 nm red)
Beam angle	255°
Configuration	Linear, 3-sided emission


SPECTRAL DISTRIBUTION

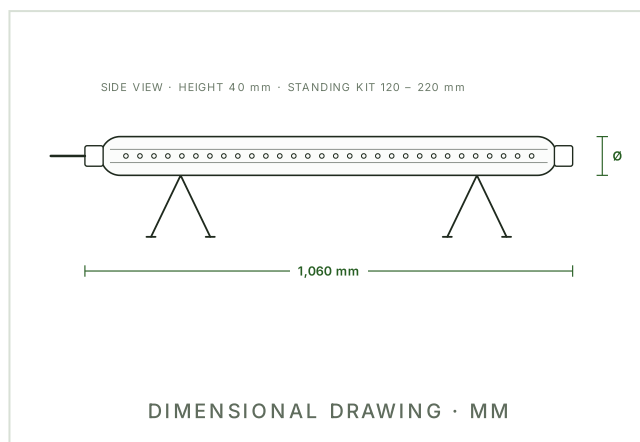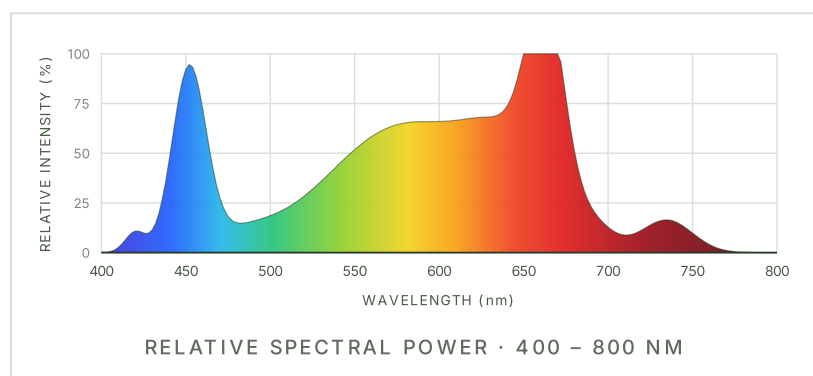

ELECTRICAL

Rated power	120 W
Input voltage	120 – 277 V AC
Input current	1.0 – 0.4 A max.
Frequency	50 / 60 Hz
Total harmonic distortion	< 10 %
Dimming	0 – 100 % dimmable

LIGHT DISTRIBUTION

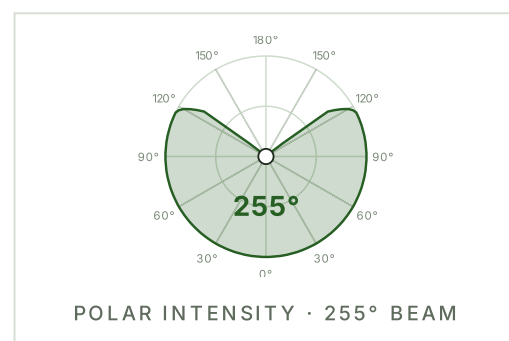

MECHANICAL

Dimensions (L × W × H)	1,060 × 65 × 40 mm
Driver	Lucius internal driver
Cooling	Passive, fanless
Max. operating temperature	130 °C
Daisy-chain	Up to 6 units
Accessories included	2 standing kits (12–22 cm) · EU plug, 1.8 m


GENERAL

Rated lifetime	L90 > 50,000 h
Warranty	3 years
Applications	Lower-canopy supplemental lighting

COMPONENTS

 Samsung LM281B Mid-power full-spectrum white LED, high efficacy, low thermal load	 OSRAM SSL 80 · 660 nm Deep-red hyper-red emitter for flowering and photosynthetic efficiency	 Lucius internal driver Constant-current driver, 120 – 277 V AC, dimmable
---	--	--

INSTALLATION

 Linkable Solution Daisy-Chaining QTY Instruction Daisy-Chain Solution	Daisy-chain solution. Up to 6 units can be linked in series from a single supply point, simplifying wiring along the row. Standing kits. Two adjustable feet (12 – 22 cm) position the fixture at lower-canopy height; the unit can also be suspended.
--	--

SERIES 2.9 RANGE

MODEL	LINE	POWER	PPF	EFFICACY	DIODES	BARS	BEAM	DIMENSIONS (MM)
Lucius 120W	Black Label	120 W	348 µmol/s	2.9 µmol/J	600	4	120°	550 × 480 × 32
Lucius 240W	Black Label	240 W	696 µmol/s	2.9 µmol/J	1,200	4	120°	550 × 480 × 32
Lucius 400W	Black Label	400 W	1,160 µmol/s	2.9 µmol/J	1,344	4	120°	790 × 780 × 32
Lucius 630W Master Control	Black Label	630 W	1,827 µmol/s	2.9 µmol/J	2,016	6	120°	1,091.9 × 1,063 × 51.6
Lucius 720W	Black Label	720 W	2,088 µmol/s	2.9 µmol/J	2,016	6	120°	1,091.9 × 1,063 × 51.6
Lucius 1000W	Black Label	1000 W	2,900 µmol/s	2.9 µmol/J	3,360	10	120°	1,085 × 1,310 × 40
Lucius 120W	Under Canopy	120 W	348 µmol/s	2.9 µmol/J	600	—	255°	1,060 × 65 × 40

OPERATING NOTES

Mount the fixture horizontally above the canopy and adjust height to the target PPFD for each growth stage; reduce output via the dimmer rather than raising the fixture whenever uniformity is a priority. Ensure adequate air exchange around the LED bars. Connect only to a supply within the rated voltage range using the supplied cable. The fixture contains no user-serviceable parts.

PPF and efficacy values are typical at rated power and 25 °C ambient after thermal stabilisation. Spectral and polar diagrams are representative. Specifications are subject to change without notice as part of continuous product improvement. Lucius® is a registered trademark. Distributed by Grupo EQT.